FEVDI

NUCLEAR EXPERT

CATALOGUE

Nuclear decontamination products and spraying equipment

Since 1969, FEVDI has been designing, manufacturing and marketing chemicals and equipment developed for the maintenance and dismantling of nuclear installations. Thanks to its laboratory, its design office and its collaborations with research institutions, FEVDI has a strong expertise to quickly solve your contamination problems.

FEVDI IT'S...

OUR VALUES

We will bring the most effective solution in terms of cleaning, decontamination of surface, and decontamination by erosion for the nuclear industry. After evaluating your needs and constraints, we will advise you on the most appropriate solution for your application based on our expertise and know-how.

SHORT DELIVERY TIME

FEVDI is a responsive company and is committed to a very short delivery time. We ensure that our best seller products such as ALCATUM, NUCLEON 3, RETENSIPH or our range of FEVDIRAD, FEVDICAP, DELNET are regularly manufactured and stocked to be ready for immediate delivery.

The ASPIGEL gels are manufactured on demand within 48h in order to keep the application duration.

OUR PRIORITY

We are committed to meet the requirement of our customers providing the best quality products and service. Our quality policy guided by the ISO9001:2015 standard, established a legal and regulatory requirements for our quality approach on each stage of manufacturing process and service delivery. We ensure to improve our organization constantly with a commitment on quality management system. We take the best care of the quality of our raw material and our supplier partners.

We can organize emergency delivery with our international forwarder partners.

OUR EXPERTISE

Based on a high level of technical requirement, FEVDI can design specific products and keep on innovation to put on the market new products. FEVDI will reconcile innovation, quality, efficiency and safety to provide the best products. All our products do not contain CMR (Carcinogenic, Mutagen, Reprotoxic) substances, and they meet the REACH (Registration, Evaluation and Restriction of Chemicals) regulation.
Most of our products are qualified PMUC which are then safe to be used in nuclear power plant.

Edition: June 2022

SUMMARY

DECONTAMINATION PRODUCTS IN CONTROLLED AREAS

Decontamination of surfaces :
Degreasers/decontaminants without effluent.....5-7
Degreasers/decontaminants with effluent..... 7-8

Decontamination by erosion :
Products without effluent.....9 -11
Products with effluent.....11-13

Passivation and decontamination.....14

Protection of equipment.....15-18

Maintenance of the premises
Products without effluent.....19-21
Surface maintenance
Products with effluent.....21-22
Maintenance of surfaces/ floors/ floor drains

Products of laundry
Products with effluent.....22-23
Softener / Decontaminant / Descaler / Wetting Agent / Laundry

Paint stripper.....24-25

INFORMATIONS

Practical information.....26

MAINTENANCE PRODUCTS OUT OF CONTROLLED AREAS

Absorbents, Cleaners, Detergents, Tampers, Solvents.....27-30

APPLICATION MATERIALS

Application of gels.....32-35
Application of foams.....35-37
Application of liquids.....37-39

PRODUCTS OF DECONTAMINATION IN CONTROLLED AREA

Decontamination of surfaces

Degreasers/decontaminants without effluent

ALCATUM® MICROFIBER TOWELS (Cellulose free)

PMUC 02-0065

Without effluent

Towels

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  Box of 15x20 towels,
  One pallet of 24 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Decontamination towels for cleaning, decontamination and degreasing of smooth surfaces. The microfibers are cellulose-free, non-woven, lint-free, it is then resistant and compatible with nitric acid.

ROULSO 80MF (Cellulose free)

Without effluent

Towels

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  Box of 4 buckets,
  One pallet of 18 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Dispenser filled with ALCATUM® IMPREGNATED MICROFIBRE TOWELS for degreasing and decontamination of smooth surfaces. Cellulose-free, non-woven, lint-free. Resistant and compatible with nitric acid.

ROULGA 80MF(Cellulose free)

Without effluent

Towels

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  Box of 8 rolls,
  One pallet of 18 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Refill rolls for ROULSO MICROFIBRES. 80 dry microfiber towels in 32x27 cm dimensions.

ALCATUM® IMPREGNATED TOWELS

PMUC 02-0065

Without effluent

Towels

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  Box of 15x20 towels,
  One pallet of 24 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Decontamination towels for cleaning, decontamination and degreasing of smooth surfaces. One side with scratching effect that does not strip the supports. The towel does not leave any marks after drying. Lint-free. Towel in 32 x 40 cm dimensions.

ROULSO 60F

Without effluent

Towels

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  Box of 4 buckets,
  One pallet of 18 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Dispenser filled with ALCATUM® IMPREGNATED TOWELS for degreasing and decontamination of smooth surfaces. One side with scratching effect that does not strip the supports. Do not leave marks after drying. Lint- free. Very practical for interventions in ventilated suit.

ROULGA 60F

Without effluent

Towels

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  Box of 8 rolls,
  One pallet of 12 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Refill rolls for ROULSO 60F.

ALCATUM ® TOWELS FOR FLOOR

PMUC 02-0065

Without effluent

Towels

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  Boxes of 6x25 towels,
  One pallet of 18 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Decontamination towels for cleaning and decontaminating floors, designed for trapezoid brooms. Do not leave marks after drying. Lint-free. Towel in 32 x 60 cm dimensions

GNS 054

Without effluent

Gel

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  5, 30 or 60 kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Self-drying neutral gel to neutralize and remove dust, remove labile contamination and degrease the supports.
  Spraying equipment : PULVE ULTRA, PUGEL HP3

ASPIGEL® 050

Without effluent

Gel

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  6, 30 or 60 kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Self-drying gel for decontamination of greasy surfaces.
  Spraying equipment : PULVE ULTRA, PUGEL HP3

ASPIGEL 052

Without effluent

Gel

- Applications
  Decontamination of surface
- Contamination
  Smearable
- Conditioning
  6, 30 or 60 kg
- Material to decontaminate
  All kind

- Type of surface
  Open surface
- Description
  Self-drying gel free of organic substance for the decontamination of greasy supports. Do not use on aluminum alloy supports or on light metals.

  Spraying equipment : PULVE ULTRA, PUGEL HP3

DECONTAMINATION OF SURFACE WITH EFFLUENT

FEVDIRAD AL GEL

With effluent

Gel

- Applications
  Decontamination of surface
- Contamination
  Smearable
- Conditioning
  6, 30 or 60 kg
- Material to decontaminate
  Stainless Steel

- Type of surface
  Open surface
- Description
  Degreasing gel, strongly alkaline decontaminant for vertical surfaces. Preserves the appearance of stainless steel. Can be used as a primer before applying an acidic or oxidizing product to greasy parts. Dissolves crystallized boron and scale.

ALCATUM ®

PMUC 02-0065

With effluent

Foam

- Applications
  Decontamination of surface
- Contamination
  Smearable
- Conditioning
  5, 20, 60 or 210 kg
- Material to decontaminate
  All kind

- Type of surface
  Hollow body
- Description
  Basic decontamination detergent, free from sodium and mineral salts. The ALCATUM® is widely used with foaming gun to decontaminate nuclear reactor pools and various areas in nuclear installations during maintenance. The ALCATUM® is also used to weak the dry film of the protective FIXATEUR LP5.

  Spraying equipment : FOAMING GUN, CAMUNI V5

ALCATUM ® HO

PMUC 02-0073

With effluent

Foam

- Applications
  Decontamination of surface
- Contamination
  Smearable
- Conditioning
  20, 60 or 210 kg
- Material to decontaminate
  All kind

- Type of surface
  Hollow body
- Description
  Basic decontamination detergent, free from sodium and mineral salts. Used in hot temperature environment and is a foaming product.

  Spraying equipment : FOAMING GUN, CAMUNI V5

FEVDIRAD AL Foam

PMUC 02-0088

With effluent

Foam

- Applications
  Decontamination of surface
- Contamination
  Smearable
- Conditioning
  5 or 20 kg
- Material to decontaminate
  Stainless Steel

- Type of surface
  Hollow body
- Description
  Degreasing foaming liquid, highly alkaline decontaminant for pipes and other hollow bodies, vertical surfaces, reactor pools. Preserves the appearance of stainless steel. Can be used as a primer before applying an acidic or oxidizing product to greasy parts. Dissolves crystallized boron and scale.

  Spraying equipment : FOAMING GUN, CAMUNI V5

FEVDIRAD AL Liquid

PMUC 02-0518

With effluent

Liquid

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  6, 30 or 60 kg
- **Material to decontaminate**
  Stainless steel
- **Type of surface**
  Open surface
- **Description**
  Degreasing liquid, decontaminating by immersion, strongly alkaline. Preserves the appearance of stainless steel. Can be used as a primer before applying an acidic or oxidizing product to greasy parts. Dissolves crystallized boron and scale.

FEVDIREM DNB

PMUC 02-0047

With effluent

Liquid

- **Applications**
  Decontamination of surface
- **Contamination**
  Smearable
- **Conditioning**
  5, 20, 60 or 210 kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Alkaline decontaminating liquid for sensitive surfaces. Non-foaming with strong degreasing power. pH = 13.5. Weakens the dry film of the FIXATEURS LP5 and LP6. Use: high pressure machines or ultrasonic machines.

GELIFOAM® 050

With effluent

Liquid

Applications
Decontamination of surface
Contamination
Smearable
Conditioning
5, or 20 L
Material to decontaminate
All kind

Type of surface
Large volume

Description
GELIFOAM® is a gelified foams for high volume and complex shapes The GELIFOAM® has a long life duration up to 5 hours before the bubble starts to break. This enable to remove the labile contamination without water rinsing.

FEVDIFOAM NEUTRAL

With effluent

Liquid

Applications
Decontamination of surface
Contamination
Smearable
Conditioning
5, or 20 L
Material to decontaminate
All kind

Type of surface
Large volume

Description
FEVDIFOAM NEUTRE is used 50/50 with the GELIFOAM® 050 to be sprayed in a gelified foam, the foaming ratio can reach from 10 to 15.



DECONTAMINATION BY EROSION

DECONTAMINATION OF SURFACE WITHOUT EFFLUENT

FEVDIRAD OX2-ASP03

PMUC 02-0058

Without effluent

Gel

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60 kg
- **Material to decontaminate**
  Stainless steel
- **Type of surface**
  Open surface
- **Description**
  Oxidizing decontaminating gel forming a dry residue after drying, which is detached from the support by gravity. The dry residue is non-powdery.

ASPIGEL® 100



Without effluent

Gel

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60kg
- **Material to decontaminate**
  Stainess steel
- **Type of surface**
  Open surface
- **Description**
  Self-drying decontaminating gel for all stainless steel supports.

  Spraying equipment : PULVE ULTRA, PUGEL HP3

ASPIGEL® 100E

Without effluent

Gel

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60kg
- **Material to decontaminate**
  Stainless steel
- **Type of surface**
  Open surface
- **Description**
  Self-drying decontaminating gel for all stainless steel supports. Guaranteed without ammonium ion.

  Spraying equipment : PULVE ULTRA, PUGEL HP3

ASPIGEL® 200

Without effluent

Gel

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60kg
- **Material to decontaminate**
  Carbon steel
- **Type of surface**
  Open surface
- **Description**
  Self-drying decontaminating gel for all ferrous supports.

  Spraying equipment : PULVE ULTRA, PUGEL HP3

ASPIGEL® 201

Without effluent

Liquid

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60 kg
- **Material to decontaminate**
  Carbon steel
- **Type of surface**
  Open surface
- **Description**
  Self-drying decontaminating gel for all ferrous supports. Contain nitric acid.

  Spraying equipment : PULVE ULTRA, PUGEL HP3

ASPIGEL® 300

Without effluent

Gel

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60 kg
- **Material to decontaminate**
  Lead
- **Type of surface**
  Open surface
- **Description**
  Self-drying decontaminating gel for lead supports.

  Spraying equipment : PULVE ULTRA, PUGEL HP3

ASPIGEL® 400

Without effluent

Gel

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60 kg
- **Material to decontaminate**
  Aluminium
- **Type of surface**
  Open surface
- **Description**
  Self-drying decontaminating gel for aluminum alloys.

  Spraying equipment : PULVE ULTRA, PUGEL HP3

ASPIGEL® 500

Without effluent

Gel

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60 kg
- **Material to decontaminate**
  Concrete
- **Type of surface**
  Open surface
- **Description**
  Self-drying decontaminating gel for concrete.

  Spraying equipment : PULVE ULTRA, PUGEL HP3

BAG OF OXINOX 20

PMUC 02-0080

Without effluent

Towels

- **Applications**
  Decontamination by erosion
- **Contamination**
  Fixed
- **Conditioning**
  Bag of 20 towels
- **Material to decontaminate**
  Stainless steel
- **Type of surface**
  Open surface
- **Description**
  Bag of 20 MICROFIBRE towels free of cellulose and impregnated with NEUTRAL FEVDIMOUSS + one bottle of FEVDIRAD OX1 or OXE LIQUID. Use by contact from 15 to 60 min without rubbing.

SACHET OXINOX 5

Without effluent

Towels

PMUC 02-0080

- Applications
  Decontamination by erosion
- Contamination
  Fixed
- Conditioning
  Bag of 5 towels
- Material to decontaminate
  Stainless steel
- Type of surface
  Open surface
- Description
  Bag of 5 MICROFIBRE towels free of cellulose and impregnated with NEUTRAL FEVDIMOUSS + one bottle of FEVDIRAD OX1 or OXE LIQUID. Use by contact from 15 to 60 min without rubbing.

DECONTAPLAST

Without effluent

Liquid

- Applications
  Decontamination by erosion
- Contamination
  Fixed
- Conditioning
  5, 20 kg
- Material to decontaminate
  Plastic
- Type of surface
  Open surface
- Description
  Elimination of Contamination fixed on plastics and plexiglass. Its action is progressive. Decontaplast does not alter the transparency of PVC and plexiglas. It can also be used on glass, stainless steel, paint, etc.

  Spraying material : Dry towels and Nuclear Laser V2

Decontamination with effluent

FEVDIRAD OX1 GEL



With effluent

Gel

PMUC 02-0056

- Applications
  Decontamination
- Contamination
  Fixed
- Conditioning
  6, 30, 60 kg
- Material to decontaminate
  Stainless steel
- Type of surface
  Open surface
- Description
  Oxidizing decontaminating gel causing an erosion of about 1 µm after a contact time of 1h30 to 2 hours maximum followed by an high pressure rinsing (150 bars).

  Spraying equipment : PULVE ULTRA, MEMBRANE PUMP, LASER G8 (8 L), LASER V2 (1 or 3 L), CANYON (1 L)

FEVDIRAD OX5 GEL

With effluent

Gel

PMUC 02-0060

- Applications
  Decontamination
- Contamination
  Fixed
- Conditioning
  6, 30, 60 kg
- Material to decontaminate
  Stainless steel
- Type of surface
  Open surface
- Description
  Oxidizing decontaminating gel causing erosion> 1 µm after a contact time of 1h30 to 2 hours maximum followed by an high pressure rinse (150 bars). Ideal for decontamination in nuclear decommissioning activities.

  Spraying equipment : PULVE ULTRA, MEMBRANE PUMP, LASER G8 (8 L), LASER V2 (1 or 3 L), CANYON (1 L)

FEVDIRAD OXE GEL

With effluent

Gel

PMUC 02-0062

- Applications
  Dedontamination
- Contamination
  Fixed
- Conditioning
  6, 30, 60 kg
- Material to decontaminate
  Stainless steel
- Type of surface
  Open surface
- Description
  Oxidizing decontaminating gel without ammonium causing erosion> 1 µm after a contact time of 1h30 to 2 hours maximum followed by an high pressure rinsing (150 bars). The reaction with the parts precise dimensions should be monitored.

  Spraying equipment : PULVE ULTRA, MEMBRANE PUMP, LASER G8 (8 L), LASER V2 (1 or 3 L), CANYON (1 L)

CERIMOUSS (STRONG)

PMUC 02-0078

With effluent

Foam

- **Applications**
  Decontamination
- **Contamination**
  Fixed
- **Conditioning**
  5L or 20L
- **Material to decontaminate**
  Stainless steel
- **Type of surface**
  Hollow body
- **Description**
  Oxidizing foaming product without ammonium for decontamination with an erosion of 0.05 to 0.1 µm on 316 stainless steel. To be used in combination 50/50 with FEVDIMOUSS NEUTRAL

FEVDIMOUSS NEUTRAL

PMUC 02-0080

With effluent

Foam

- **Applications**
  Decontamination
- **Contamination**
  Smearable
- **Conditioning**
  5L or 20L
- **Material to decontaminate**
  All kind
- **Type of surface**
  Hollow body
- **Description**
  Foaming decontaminating solution at neutral pH used in combination with CERIMOUSS (STRONG). Can be used pure or diluted.

GELIFOAM ® 100

With effluent

Foam

- **Applications**
  Decontamination
- **Contamination**
  Fixed
- **Conditioning**
  5L or 20L
- **Material to decontaminate**
  Stainless steel
- **Type of surface**
  Large volume and complex shape
- **Description**
  GELIFOAM ® 100 is a gelified foams for high volume and complex shapes. It has a long life duration up to 5 hours before the bubble starts to break. This enable to remove the fixed contamination without water rinsing.

FEVDIFOAM NEUTRAL

With effluent

Foam

- **Applications**
  Decontamination
- **Contamination**
  Smearable
- **Conditioning**
  5L or 20L
- **Material to decontaminate**
  All kind
- **Type of surface**
  Large volume and complex shape
- **Description**
  FEVDIFOAM NEUTRAL is used 50/50 with the GELIFOAM ® 100 to be sprayed in a gelified foam, the foaming ratio can reach from 10 to 15.

FEVDIRAD OX1 LIQUID

PMUC 02-0056

With effluent

Liquid

- **Applications**
  Decontamination
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60 kg
- **Material to decontaminate**
  Stainless steel
- **Type of surface**
  Hollow body
- **Description**
  Oxidizing decontaminating liquid causing rapid erosion, for use in baths. The reaction with the parts precise dimensions should be monitored.

FEVDIRAD OX5 LIQUID

PMUC 02-0060

With effluent

Liquid

- Applications
  Decontamination
- Contamination
  Fixed
- Conditioning
  6, 30, 60 kg
- Material to decontaminate
  Stainless steel
- Type of surface
  Hollow body
- Description
  Oxidizing decontaminating liquid causing rapid erosion, for use in baths. The reaction with the parts precise dimensions should be monitored.

FEVDIRAD OXE LIQUID

PMUC 01-0105

With effluent

Liquid

- Applications
  Decontamination
- Contamination
  Fixed
- Conditioning
  6, 30, 60 kg
- Material to decontaminate
  Stainless steel
- Type of surface
  Hollow body
- Description
  Oxidizing decontaminating liquid without ammonium causing rapid erosion, for use in baths. The reaction with the parts precise dimensions should be monitored.

Steel passivation and decontamination

FEVDIRAD AC2 LIQUID

PMUC 02-0063

With effluent

Liquid

- Applications
  Passivation
- Contamination
  Smearable
- Conditioning
  6, 40 or 80 kg
- Material to decontaminate
  Stainless steel

- Type of surface
  Open surface
- Description
  Degreasing liquid, decontaminating by immersion, strongly alkaline. Preserves the appearance of stainless steel. Can be used as a primer before applying an acidic or oxidizing product to greasy parts. Dissolves crystallized boron and scale.

FEVDIRAD AC2 FOAM

PMUC 02-0063

With effluent

Foam

- Applications
  Passivation
- Contamination
  Smearable
- Conditioning
  6, 40 or 80 kg
- Material to decontaminate
  Stainless steel

- Type of surface
  Hollox body
- Description
  Degreasing foaming liquid, highly alkaline decontaminant for pipes and other hollow bodies, vertical surfaces, reactor pools. Preserves the appearance of stainless steel. Can be used as a primer before applying an acidic or oxidizing product to greasy parts. Dissolves crystallized boron and scale.

FEVDIRAD AC2 GEL

PMUC 02-0063

With effluent

Gel

- Applications
  Passivation
- Contamination
  Smearable
- Conditioning
  6, 30 or 60 kg
- Material to decontaminate
  Stainless steel

- Type of surface
  Open surface
- Description
  Very acid gel for decontamination and passivation of stainless steel, decontamination of lead, dissolution of crystallized soda, detachment of silicone seals. pH 0.



Contamination protection

FEVDISIL PB

Without effluent

Gel

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  2x20kg, double cartridge
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  FEVDISIL PB is a product formed from two components called FEVDISIL PB1 and FEVDISIL PB2 to be mixed 50/50 using a spatula, or a static mixer. The FEVDISIL PB is polymerized film and forms an impermeable and water-resistant barrier, even at low acid or alkaline levels. It makes it possible to make a airtight barrier or watertight or to plug a small hole. Thus, the surfaces covered with this film are protected from any contamination. After protecting the support, it is easily removed manually by peeling it off.

  Spraying equipment : PUGESIL 1:1, PUGELSIL AC, PUGESIL MANUAL

FIXAPRO P02



Without effluent

Gel

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  5, 20 or 60kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Gel forming a peelable film after drying, can be easily removed manually. Recommended for use for decontamination (to be removed within one week after its application) or for the final protection of parts. Can be used on parts in immersion in short duration (maximum 1 week).

  Spraying equipment : PULVE ULTRA, PROJET PRO 350M

FIXAPRO P03

PMUC 03-0095

Without effluent

Gel

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  5, 20 or 60kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Gel forming a peelable film after drying, can be easily removed manually. Recommended for the protection of parts over periods from a few days to a few months. Can be used on parts in immersion in short duration (maximum 1 week).

  Spraying equipment : PULVE ULTRA, PROJET PRO 350M

FOAMFIX 01

Without effluent

Foam

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  20kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Hollow body
- **Description**
  Fixes the contamination under a protective foam to prevent the spread of contamination subjected to external elements.

FIXATEUR LP3

Without effluent

Liquid

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  5, 20 or 60kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Product forming a transparent colorless film for protection or definitive fixation of contamination. Fixes contamination, dust and crystals.

  Spraying equipment : PULVE ULTRA, PROJET PRO 350M

FIXATEUR LP5

With effluent

Liquid

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  5, 20 ou 60kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Forms a colorless protective film on many surfaces. Temporary protection. The protective film weakens on contact with the ALCATUM® and can therefore be easily removed with water. Application by brush, roller or sprayer.

  Spraying equipment : PULVE ULTRA, PROJET PRO 350M

FIXATEUR LP6

PMUC 03-0096

With effluent

Liquid

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  5, 20 ou 60kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Forms a white protective film on many substrates. Temporary protection. The protective film weakens on contact with FEVDIREM DNB. It can thus be easily removed with water. Application by brush, roller or a sprayer. Available in various color: yellow, red, green,
  Spraying equipment : PULVE ULTRA, PROJET PRO 350M

FIXATEUR LP6 SPRAY

Without effluent

Liquid

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  5, 20 ou 60kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Sprayable liquid forming a white protective film on many supports. Temporary protection. The protective film weakens on contact with FEVDIREM DNB. It can thus be easily removed with water.

  Application by brush, roller or a sprayer

PROTECONCRETE

Without effluent

Liquid

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  20L
- **Material to decontaminate**
  Concrete
- **Type of surface**
  Concrete
- **Description**
  Concrete protective is a 100% mineral product that produce glass inside of concrete pores. This creates a physical barrier avoiding concrete to be contaminated.
  It is be used after decontamination to prevend secondary contamination.

AEROFIX

Without effluent

Aérosol

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  Box of 12 units
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Cloth
- **Description**
  Spray of a fixative film in aerosol to fixe the contamination on textiles and flexible plastic materials (i.e ventilated suits). The spray forms a colorless film resistant to high temperatures and UV.

AEROFIX BLUE

Without effluent

Aérosol

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  Box of 12 units
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Cloth
- **Description**
  Spray of afixativefilm in aerosol to fixethe contamination on textiles and flexible plastic materials (i.e ventilated suits). The spray forms a blue color film resistant to high temperatures and UV.

AEROFIX LIQUID

Without effluent

Aérosol

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  4x5L
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Cloth
- **Description**
  Spray of a fixative film in liquid to fixe the contamination on textiles and flexible plastic materials (i.e ventilated suits). The spray forms a colorless liquid film resistant to high temperatures and UV.

AEROFIX LIQUID BLUE

Without effluent

Aérosol

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  4x5L
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Cloth
- **Description**
  Spray of a fixative film in liquid to fixe the contamination on textiles and flexible plastic materials (i.e ventilated suits). The spray forms a blue color liquid film resistant to high temperatures and UV.

FIXNOSOLV A and B

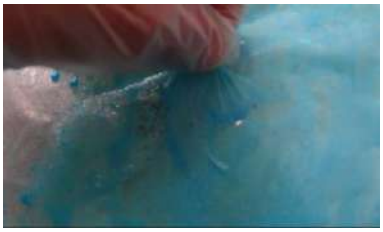

Without effluent

Aérosol

- **Applications**
  Contamination protection
- **Contamination**
  Smearable
- **Conditioning**
  4x5L
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Cloth
- **Description**
  Spray of a fixative film in liquid to fixe the contamination on textiles and flexible plastic materials (i.e ventilated suits). FIXNOSOLV A and B is two components products to fixe the contamination on the surface without using solvant.

Cleaning in radioactive area

ROULSO MICROFIBERS

PMUC 02-0065

Without effluent

Towels

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  Box of 4 buckets, one pallet of 18 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Bucket containing a roll of 80 dry microfiber towels in 32x27 cm dimensions.

ROULGA MICROFIBERS

PMUC 02-0065

Without effluent

Towels

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  Box of 8 rolls, one pallet of 12 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Refill rolls for ROULSO MICROFIBRES. 80 dry microfiber towels in 32x27 cm dimensions.

ROULSO N7

Without effluent

Towels

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  Box of 4 buckets, one pallet of 18 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Bucket containing a roll of 80 dry microfiber towels in 32x27 cm dimensions impregnated with FEVDISOLV N7, a degreasing solvent with rapid evaporation. Does not leave a trace after degreasing and drying.

MICROFIBRES 32X40 dry towels (cellulose free)

Without effluent

Towels

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  Box of 15x20 towels, one pallet of 24 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Towels for cleaning and wiping smooth surfaces. Cellulose-free, non-woven, lint-free. Resistant and compatible with nitric acid at high concentration and with products from the FEVDIRAD range.

100% VISCOSE (WHITE) TOWELS (cellulose free)

Without effluent

Towels

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  Box of 10x40 towels
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Very absorbent towels. Cellulose-free, non-woven, lint-free. Resistant and compatible with nitric acid at high concentration and with products from the FEVDIRAD range.

DRY TOWELS DNM4

Without effluent

Towels

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  Box of 25x20 towels, one pallet of 20 boxes
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Very absorbent, non-woven, lint-free towels. Has a smooth face and a scratching side. **Not compatible with nitric acid products.**

ANTI-DUST TOWEL

Without effluent

Towels

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  Box of 10 bags of 50 units folded in 4
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  ANTI-DUST TOWEL has an impregnated with a sticky resin to remove and keep the dust on towel.
  The ANTI-DUST TOWEL does not contain halogen and is compatible for nuclear waste storage.
  Dimension of 32 x 40 cm size in white color.

BIOSOLV N7 GEL

PMUC 01-0161

Without effluent

Gel

- **Applications**
  Cleaning
- **Contamination**
  Fixed
- **Conditioning**
  12x1L or 4x5L
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Dissolving glues of joints adhesives of Steam Generator taps and other adhesives, resins and inks. Degreasing of parts. Flash point 43 °C.

BIOSOLV

Without effluent

Liquid

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  5, 30 or 60kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Safety solvent for degreasing parts. Dissolving resins and inks. Biodegradable and not classified. Flash point > 100 °C.

BIOSOLV 5

Without effluent

Liquid

- Applications
  Cleaning
- Contamination
  Smearable
- Conditioning
  5, 30 or 60 kg
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Safety solvent for degreasing parts. Dissolving resins and inks. Decontamination of glove boxes. Biodegradable and not classified. Flash point 65 °C.

BIOSOLV N6 LIQUID

PMUC 01-0134

Without effluent

Liquid

- Applications
  Cleaning
- Contamination
  Fixed
- Conditioning
  12x1L or 4x5L
- Material to decontaminate
  All kind
- Type of surface
  Horizontal surface
- Description
  Finishing product, quick-drying, dissolving joint adhesives of Steam Generator taps and other adhesives, resins and inks. Flash point 43 °C.

FEVDISOLV N5

PMUC 02-0081

Without effluent

Liquid

- Applications
  Cleaning
- Contamination
  Smearable
- Conditioning
  12x1L, 4x5L, 30L, 60L or 200L
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Fast drying degreasing and decontamination solvent. Low odor (aromatic free). Flash point 42 °C.

ANTIFOAM S

With effluent

Liquid

- Applications
  Cleaning
- Contamination
  Smearable
- Conditioning
  6 or 20kg
- Material to decontaminate
  Liquids
- Type of surface
  Hollow body
- Description
  Anti-foaming agent. Very effective at low doses.

FEVDIREM DS

PMUC 02-0042

With effluent

Liquid

- Applications
  Cleaning
- Contamination
  Smearable
- Conditioning
  5, 20, 60 or 210kg
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Liquid for decontamination of sensitive surfaces, acidic and non-foaming, leaves no traces, even without rinsing. Trap Silver 110. pH 2.5.

QUANTUM

PMUC 02-0048

With effluent

Liquid

- **Applications**
  Cleaning
- **Contamination**
  NA
- **Conditioning**
  5, 20 or 210kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Decontaminating liquid at neutral pH, non-foaming, mainly used for soil decontamination.

QUANTUM 30

With effluent

Liquid

- **Applications**
  Cleaning
- **Contamination**
  Smearable
- **Conditioning**
  5, 20 or 210kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Liquid decontaminant at neutral pH, not foaming mainly used for soil decontamination. Ready to use for single brush use.

  Application material: Single brush (off-range).

RETENSIPH

PMUC 24-0078

With effluent

Liquid

- **Applications**
  Cleaning
- **Contamination**
  NA
- **Conditioning**
  4x5 or 20
- **Material to decontaminate**
  All kind
- **Type of surface**
  Hollow body
- **Description**
  Very low evaporation rate product for filling retention tanks and floor drains. In the event of a fire, it prevents the spread of fire and gases. It also prevent the spread of contaminated air coming from the retention and floor drains.

RETENSIPH UV



With effluent

Liquid

- **Applications**
  Cleaning
- **Contamination**
  NA
- **Conditioning**
  4x5 or 20 L
- **Material to decontaminate**
  All kind
- **Type of surface**
  Hollow body
- **Description**
  Product with very low evaporation for filling retention tanks and soil traps. In case of fire, it avoids the spread of fire and gases. Level visible in the siphons thanks to a UV lamp and avoids premature clogging of the filters.

  Application material: UV lamp (out of range).

Laundry

FEVDIREM MD

With effluent

Liquid

- **Applications**
  Laundry
- **Contamination**
  Smearable
- **Conditioning**
  20 or 210kg
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Fabrics
- **Description**
  Wetting agent, detergent and anti-redeposition used for textile prewash.

  Application in washing machine (out of range).

FEVDIREM DT

With effluent

Liquid

- **Applications**
  Laundry
- **Contamination**
  Fixed
- **Conditioning**
  20 or 210kg
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Fabrics
- **Description**
  Acid decontaminant and deoxidizer for all textiles.

NUCLEON 3

PMUC 02-0021

With effluent

Liquid

- **Applications**
  Laundry
- **Contamination**
  Smearable
- **Conditioning**
  30 or 210kg
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Fabrics
- **Description**
  Liquid decontaminating detergent used for washing and decontaminating all textiles and shoes.

  Application in washing machine (out of range).

NUTRIUM

With effluent

Liquid

- **Applications**
  Laundry
- **Contamination**
  NA
- **Conditioning**
  20, 30 or 210kg
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Fabrics
- **Description**
  Enzymatic liquid detergent used for washing and decontaminating all textiles and shoes.

  Application in washing machine (out of range).

FEVDIREM AST

PMUC 02-0001

With effluent

Liquid

- **Applications**
  Laundry
- **Contamination**
  NA
- **Conditioning**
  20 or 210kg
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Fabrics
- **Description**
  Fabric softener that leaves a pleasant smell on the laundry.

  Application in washing machine (out of range).

FEVDIREM DT2

PMUC 02-0020

With effluent

Liquid

- **Applications**
  Laundry
- **Contamination**
  Fixed
- **Conditioning**
  5, 20 or 210 kg
- **Material to decontaminate**
  Fabrics
- **Type of surface**
  Fabrics
- **Description**
  Descaling, decalcifying, descaling calcium. Unaffected by water hardness. Does not form a precipitate. Eliminates scale in washing machines.

  Application in washing machine (out of range).

Paint stripping

BIODECAP 02 GEL

PMUC 01-0105

Without effluent

Gel

- **Applications**
  Paint stripper
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Thick gel paint stripper with neutral pH to remove a large number of type of paints, including lead paints, without being corrosive. Ask for a sample to determine the best stripper for your paint.

  Brush or Roller (out of range).

BIODECAP 03 GEL

PMUC 01-0106

Without effluent

Gel

- **Applications**
  Paint stripper
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Fluid gel paint stripper with acid pH, for a faster action and recommended for use on paints unaffected by neutral strippers. Ask for a sample to determine the best stripper for your paint.

  Brush or Roller (out of range).

BIODECAP 03 GEL SPRAY

Without effluent

Gel

- **Applications**
  Paint stripper
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Fluid sprayable paint stripper gel with acidic pH, for a faster action and recommended for use on paints unaffected by neutral strippers. Ask for a sample to determine the best stripper for your paint.

  Brush or Roller (out of range), EXPERT 14 VITON

BIODECAP 04 GEL

Without effluent

Gel

- **Applications**
  Paint stripper
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Sprayable fluid paint stripper gel at with acidic pH, recommended for use in the stripping of highly crosslinked paints, in thick layers and / or in multilayers. It acts slowly but deeply. Ask for a sample to determine the best stripper for your paint.

  Brush or Roller (out of range).

BIODECAP 03 LIQUID

With effluent

Liquid

- **Applications**
  Paint stripper
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60 kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Hollow body
- **Description**
  Liquid paint stripper with acidic pH, for a faster action and recommended for use on paints unaffected by neutral strippers. Ask for a sample to determine the best stripper for your paint.

  Have to be applied in bath.

BIODECAP 04 LIQUID

With effluent

Liquid

- **Applications**
  Paint stripper
- **Contamination**
  Fixed
- **Conditioning**
  6, 30, 60kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Hollow body
- **Description**
  Liquid paint stripper gel at with acidic pH, recommended for use in the stripping of highly crosslinked paints, in thick layers and / or in multilayers. It acts slowly but deeply. Ask for a sample to determine the best stripper for your paint.

  Have to be applied in bath.

Practical information

NOTE ON PRODUCTS AND MATERIALS USABLE IN A NUCLEAR POWER PLANT

The chemicals used in EDF's nuclear power plants must be safe to operate. These products have therefore been the subject of chemical analyses and innocuits by several EDF departments and independent laboratories. The products that have met the specifications and standards established by EDF are labeled PMUC (Products and Materials Usable in Power Plants) and a unique PMUC number is assigned for each of them and are labeled with the label:

PMUC
Produits et Matériaux Utilisables en Centrale

Each FEVDI product is systematically checked by our quality department after its manufacture. Those with a PMUC label are also regularly analysed by an EDF-approved laboratory to check their highly limited sulphur and halogen levels in accordance with chemical specifications D5710/IMC/1999/007111/Ind. 0.

The entire FEVDI team is at your disposal to provide solutions to your technical problems. If necessary, our design and development laboratory is at your disposal to produce products specific to your needs.

NOTE ON SAFETY CARDS

European Regulation No 1272/2008 (known as CLP) lays down the methods for classifying chemicals. Those classified or containing dangerous substances requiring follow-up must be placed on the market accompanied by a Safety Data Sheet (SDS) established in accordance with European regulation no. 1907/2006 called REACH.

During your purchase , you can download the safety sheet from the FEVDI website at the following address:

https://fevdi-nuclear.com/FDS

In order to provide you with a quality service, you must register (free of charge) in order to download the sheets. When registering, you will be asked for an email address, which will ONLY be used to notify you of the update of the safety sheets you have downloaded.

CLEANING PRODUCTS FOR OUT OF CONTROLLED AREA

Cleaning in none radioactive area

ABSORBENT OF LIQUID GA 25-50

Without effluent

Solid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  NA
- **Conditioning**
  20L
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Calcined diatomaceous earth with high absorbency of all liquids.

FEVDICAP COPPER

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  Fixed
- **Conditioning**
  5kg
- **Material to decontaminate**
  Copper alloys
- **Type of surface**
  Open surface
- **Description**
  Decontamination and renovation of copper supports.

  Spraying equipment : LASER 7 VITON

DELNET 12S

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  NA
- **Conditioning**
  5L or 20, 60 or 220kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Super cleaner for machine washing floors: removes tires tracks on painted floors or concrete floors. Used as a degreaser of equipment and tools in the food industry. Food Standard *

  Spraying equipment : Scrubber (out of range).

DELNET SM4

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  NA
- **Conditioning**
  5L ou 20, 60 ou 220kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Concentrated foaming shampoo for washing car bodies without friction. Elimination of road film.

  Spraying equipment : LASER 10 MOUSSE, FOAMING GUN, CAMUNI V5

DELNET GLASS

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  NA
- **Conditioning**
  5, 20, 60 or 210L
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Concentrated product for cleaning windows, mirrors, etc. Used in windshield washer. Resists frost at -24 ° C. Flash point at 29 ° C. Blue color - No odor.

  Manual sprayer.

DELNET MO

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  NA
- **Conditioning**
  20, 60 ou 220kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Anti-corrosion foaming detergent for manual cleaning of machine tools. Ideal for degreasing ferrous supports sensitive to water without solvent.

  Manual sprayer.

DELNET VAPOR

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  Smearable
- **Conditioning**
  20, 60 or 220kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Detergent for hot water machines for cleaning engines, chassis and public works vehicles.

  Spraying equipment : High pressure hot water machine (out of range)

ECOZYM

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  Smearable
- **Conditioning**
  5, 20, 60 or 210L
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Universal foaming detergent ULTRA DEGREASER at pH <9 acting on all types of supports, all preserving them. Respect the environment.
  Yellow color - Grapefruit fragrance.

  Spraying equipment : LASER 10 MOUSSE, FOAMING GUN, CAMUNI V5

DETARCID

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  NA
- **Conditioning**
  5, 10 L or 30, 60 kg
- **Material to decontaminate**
  All kind

- **Type of surface**
  Open surface
- **Description**
  Descaling and cleaning of swimming pools, tanks, heating installations, sanitary installations, condensers, generators, coils of hot water machines.

  Have to be applied in bath or by filling.

FEVDICAP DP

With effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  NA
- **Conditioning**
  5L , 35 or 70kg
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Liquid to be used as a rust remover, descaler, passivating for ferrous metals.

Spraying equipment : LASER 7 VITON

FEVDISOLV BG

Without effluent

Liquid

- **Applications**
  Cleaning in none radioactive area
- **Contamination**
  NA
- **Conditioning**
  5, 30, 60 or 210L
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Solvant to remove resin, tape, ink, marks, etc..
  Solubilizes the oil in the water and allows its rinsing.
  Cleaning of cylinder head gasket cooling circuits.
  Flash point at 63°C

Spraying equipment : Manual spray

SPRAYING EQUIPMENT

FOAMING GUN EQUIPMENT SET

Application

CAMUNI V5 is used to spray foam on large surface such as nuclear reactor cavity,

- One single equipment to spray foam and water rinsing
- It can use with single gun or a double gun for both spraying and rinsing.

Spraying equipment

SET OF DIAPHRAGM PUMP FOR 30 L DRUM

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Diaphragm pump fitted with a 10 m hose and a 60 cm spray gun, mounted directly on the cover of a 30 L total opening drum, for suction of the product in its original packaging and then spraying.
  Used for liquid product and FEVDIRAD Gel range.

SET OF DIAPHRAGM PUMP FOR 60 L DRUM

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Diaphragm pump fitted with a 10 m hose and a 60 cm spray gun, mounted directly on the cover of a 60 L total opening drum, for suction of the product in its original packaging and then spraying.
  Used for liquid product and FEVDIRAD Gel range.

SET OF DIAPHRAGM PUMP FOR 60 L DRUM WITH TROLLEY

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Diaphragm pump fitted with a 10 m hose and a 60 cm spray gun, mounted directly on the cover of a 30 L total opening drum, for suction of the product in its original packaging and then spraying. Delivered with a trolley for 60 L drum.
  Used for liquid product and FEVDIRAD Gel range.

30L DRUM SUPPORT FOR DIAPHRAGM PUMP SET

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Support for 30 L drum surmounted by a diaphragm pump fitted with a 10 m hose and a 60 cm spray gun, used to stabilized the drum when spraying the product in its original packaging.

PUGEL HP3

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  High flow stainless steel piston pump with 15 m high pressure resistance hose and modular spray gun. The spray gun can be fitted with tool in options and spray extensions. Designed for spraying all FEVDI gels.
  The PUGEL HP3 could also be used at high rate liquid product

PUGESIL 1:1

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Metering and spraying device for FEVDISIL PB silicone protection products

PUGESIL MANUAL

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Metering and spraying device for silicone protection products FEVDISIL PB manually operated.

PUGESILAC

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Spraying device for FEVDISIL PB silicone protection products, actuated with compressed air.

AIR ASSIT

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Tool to be used with PUGESIL AC to spray a protective product

VACLEAN

Without effluent

Liquid

- **Applications**
  Vacuum cleaner
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  VACLEAN is design to remove liquid waste and solid waste such as the dried residues from the ASPIGEL.

PULVE ULTRA 220V

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  220 V portable sprayer for decontaminating gels. Available with 5 spare cup and 1 spare cup holder.

PULVE ULTRA 18V

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  18V battery powered mobile sprayer for decontaminating gels. Available with 5 spare cup and 1 spare cup holder.

PROJET PRO 350M

With effluent

Gel

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Piston pump fitted with a 15 m hose and a HEA spray gun. The assembly allows spraying with minimal misting of the FIXATEUR and FIXAPRO on large areas.

POLE MULTIPOOL

With effluent

Foam

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Modular pole 2.5 to 25 m for the decontamination of nuclear reactor pools wall and floor at a high level, without going down to the reactor pool, it is recommended by ALARA «Optimization of decontamination» (EDF standard).

CAMUNI V5

With effluent

Foam

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Device for generating foam, spraying it and then rinsing it. The CAMUNI V5 is equipped with a single spray gun with optional extensions or a double spray gun allowing spraying and then water rinsing.

FOAM GUN 24L STAINLESS STEEL

With effluent

Foam

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Pressurized foaming gun to generate foam and then spray it. Tank of 24 L.

FOAM GUN 50L STAINLESS STEEL

With effluent

Foam

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Pressurized foaming gun to generate foam and then spray it. Tank of 50 L.

HOSE 25M WIRE REINFORCED

With effluent

Foam

- **Applications**
  Spraying equipment
- **Contamination**
  Non
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Volume ouvert
- **Description**
  25 m long hose with a steel wire embedded in a polyurethane inner, fitted with reinforced crimping skirts in stainless steel, Gromelle self-sealing couplings, an anti-bending spring and a anti-whip system. It is designed to be used with acidic, neutral or basic liquids or foams.

  Application : CAMUNI V5, FOAM GUN STAINLESS STEEL, POLE MULTIPOOL.

HOSE 30M WIRE REINFORCED

With effluent

Foam

- **Applications**
  Spraying equipment
- **Contamination**
  Non
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Volume ouvert
- **Description**
  30m inner polyurethane hose with a steel wire embedded in the ground, length 25m, equipped with reinforced stainless steel crimp skirts, Gromelle stainless steel coupling and self-sealing end, an anti-bending spring and an anti-whip system. It is designed to convey acidic, neutral or basic Liquids or Foams.

  Application : CAMUNI V5, FOAM GUN STAINLESS STEEL, POLE MULTIPOOL.

LASER 12 FOAM (Industrial) EPDM - *Replacing LASER10 FOAM*

With effluent

Foam

- Applications
  Spraying equipment
- Contamination
  None
- Conditioning
  Unit
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Pressurized sprayer with tank and manual pump. Applications of alkaline foaming products, detergents.

LASER 12 MOUSSE (Nuclear) EPDM - *Replacing LASER 10 FOAM*

With effluent

Foam

- Applications
  Spraying equipment
- Contamination
  None
- Conditioning
  Unit
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Pressurized sprayer with tank, stainless steel flat jet nozzle and manual pump. Applications of alkaline foaming products, detergents.

CANYON

With effluent

Liquid

- Applications
  Spraying equipment
- Contamination
  None
- Conditioning
  Unit
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Manual sprayer with 1L full opening tank

EXPERT 14 EPDM - *REPLACING EXPERT 13*

With effluent

Liquid

- Applications
  Spraying equipment
- Contamination
  None
- Conditioning
  Unit
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Pressurized sprayer with tank and manual pump. Application of cleaning products, shampoos for vehicles, disinfectants, alkalis, fungicides, chemical weedkillers, repellents for animals.

EXPERT 14 VITON - *REPLACING EXPERT 13*

With effluent

Liquid

- Applications
  Spraying equipment
- Contamination
  None
- Conditioning
  Unit
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Pressurized sprayer with tank and manual pump. Application of formwork removal oils, water repellents for facades, wood and frame treatment products, solvent-based strippers, rodent control products, pest control products, tar removers, neutral-based antifoam.

LASER 12 VITON - *Replacing LASER 10*

With effluent

Liquid

- Applications
  Spraying equipment
- Contamination
  None
- Conditioning
  Unit
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Pressurized sprayer with tank and manual pump. Application of deactivators and diluted acids.

LASER 7 - *Replacing G8*

With effluent

Liquid

- Applications
  Spraying equipment
- Contamination
  None
- Conditioning
  Unit
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Pressurized sprayer with tank and manual pump. Application of deactivators and diluted acids.

LASER 7 (Nuclear) - *Replacing G8*

With effluent

Liquid

- Applications
  Spraying equipment
- Contamination
  None
- Conditioning
  Unit
- Material to decontaminate
  All kind
- Type of surface
  Open surface
- Description
  Pressurized sprayer with tank, stainless steel flat jet nozzle and manual pump. Application of deactivators and diluted acids.

LASER V2

With effluent

Liquid

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Pressurized sprayer with tank and manual pump. Application of deactivators and diluted acids.

LASER V2 NUCLEAR

With effluent

Liquid

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Pressurized sprayer with tank, 30 cm extension fitted with a stainless steel flat jet nozzle and manual pump. Application of deactivators and diluted acids.

COMPRESSED AIR SPRAYER ROSSIGNOL

With effluent

Liquid

- **Applications**
  Spraying equipment
- **Contamination**
  None
- **Conditioning**
  Unit
- **Material to decontaminate**
  All kind
- **Type of surface**
  Open surface
- **Description**
  Compressed air sprayer with 500 mL aluminum tank. Designed for spraying FIXATEUR by being connected directly to a compressed air supply network.

CONTACT

24 rue Louis Pradel
BP 365
69969 CORBAS CEDEX
France

04 78 20 53 35
contact@fevdi-nuclear.com

www.fevdi-nuclear.com

FEVDI
NUCLEAR EXPERT

afaq ISO 9001 Qualité AFNOR CERTIFICATION